

SPLITMASTER

Australia's *most powerful* and *reliable* log splitter

LS 35

Features

- 35 ton (horizontal/vertical)
- Engines - GX 270 Honda
10.5hp Briggs & Stratton
- Two stage pump @16gpm
- Log length of 660mm



ACCESSORIES


Additional aftermarket parts



4-way Splitting Wedge



Log splitter Cover



Flat Tables



Block Catcher

STRONGEST, SAFEST BEAM DESIGN



Full length beam

- Ultimate strength with full ram support
- Prevents stress & fatigue on front of ram



Enclosed splitting head track

- Maintenance free with no shims or bolts
- Safer operation, no pinch points
- Minimum wear of splitting head & slide track



Built in log Cradle

- Safer operation, quicker, easier and safer
- Stops log rolling off log splitter
- Prevents operator needing to hold log while splitting



USA Premium Quality

- Quality hydraulics with high flow two stage pump
- No cheap parts to cause breakdowns & downtime
- Warranty and backup Australian wide

LS 28

Features

- 28 ton (horizontal/vertical)
- 10.5hp Briggs & Stratton
- Two stage pump @16gpm
- Log length of 660mm



LS 22 B

Features

- 22 ton (horizontal/vertical)
- 6.5hp Briggs & Stratton
- Two stage pump @ 11gpm
- Log length of 660mm



LS 15

Features

- 15 ton (horizontal)
- Engines - Speeco 6.5hp
- Honda 6.5hp
- Two stage pump @ 11gpm
- Log length of 480mm



LS 22 H

Features


- 22 ton (horizontal/vertical)
- 6.5hp Honda engine
- Two stage pump @ 11gpm
- Log length of 660mm



TRACTOR 3PL

Features

- Cat 1 & 2 linkage
- Includes bolt on feet
- Up to 22 ton splitting force

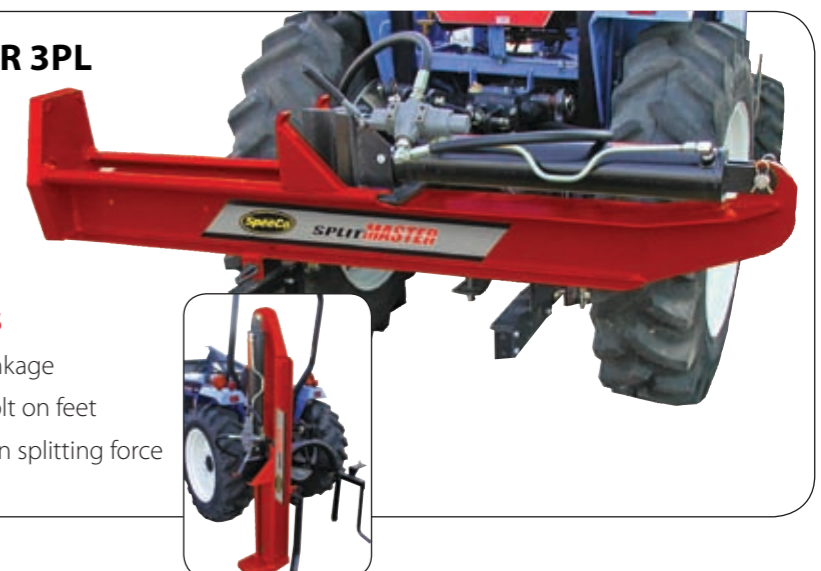

Unique features of the **SPLITMASTER** logsplitter.



LOGSPLITTER SPECIFICATIONS

Specifications	Details				
MODEL	LS15	LS22	LS28	LS35	3PL
Splitting Force	15 Tons	22 Tons	28 Tons	35 Tons	22 Tons
Beam Size (mm)	115 x 180	152 x 230	200 x 225	200 x 225	152 x 230
Cylinder Size (inches)	3.5 x 18	4 x 24	4.5 x 24	5 x 24	4 x 24
Pump (Gallons/min)	Two stage 11gpm	Two stage 11gpm	Two stage 16gpm	Two stage 16gpm	Tractor
Engine Options	Speedco 6.5hp Honda 6.5hp	B&S 6.5hp Honda 6.5hp	B&S 10.5hp	B&S 10.5hp Honda 8hp	N/A
Wedge Height (mm)	150	180	205	205	180
Maximum Log Length (mm)	480	660	660	660	660
Total Hydraulic Oil Capacity	10 Litres	20 Litres	25 Litres	25 Litres	N/A
Height (mm)	914 Hor	1066 Hor 1830 Vertical	1066 Hor 1830 Vertical	1066 Hor 1830 Vertical	1066 Hor 1830 Vertical
Length (mm)	914	2145	2200	2200	2145
Width (mm)	1150	1270	1270	1270	1270
Tyre Size (inches)	4.80 x 8	4.80 x 8	4.80 x 8	4.80 x 8	N/A
Filter Type	Spin-on replaceable	Spin-on replaceable	Spin-on replaceable	Spin-on replaceable	N/A
Recommended Accessories	• Block Catcher	• Block Catcher • Flat Tables	• Block Catcher • Flat Tables • 4-way Wedge	• Block Catcher • Flat Tables • 4-way Wedge	• Block Catcher • Flat Tables
Weight (kg)	115	270	310	330	170

